

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number
WO 2004/111361 A1

(51) International Patent Classification⁷: **E04C 3/04**,
3/06, 3/07, F16S 3/04, 3/06

(21) International Application Number:
PCT/AU2004/000805

(22) International Filing Date: 18 June 2004 (18.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003903086 18 June 2003 (18.06.2003) AU

(71) Applicant and

(72) Inventor: VASTA, Salvatore [AU/AU]; 20 Cattle Street,
Edmonton, Queensland 4869 (AU).

(74) Agent: GRIFFITH HACK; 10/167 Eagle Street, GPO
Box 3125, Brisbane, Queensland 4000 (AU).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance
Notes on Codes and Abbreviations" appearing at the beginning
of each regular issue of the PCT Gazette.*

(54) Title: EXTENSIBLE BEAM

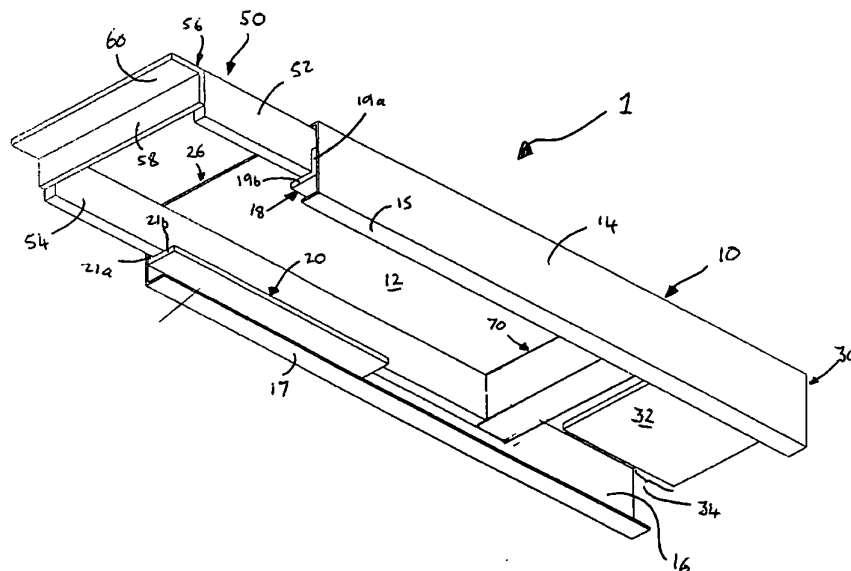

(57) Abstract: An extensible beam (1) comprising: a first, elongate element (10), a second element (50) adapted to move relative to the first elongate element in order to vary the amount of overlap between the first and second elements and thereby vary the length of the beam. Wherein the first element includes first (18) and second (20) support portions and the second element includes first (52) and second (54) spaced apart strut members for engagement with the first and second support portions respectively.

WO 2004/111361 A1